



TVORNICA KVARCNOG PIJESKA, MALTERA,
FASADA, FASADNIH BOJA I GRAĐEVINSKIH LJEPILA

www.pjeskaraba.ba

Kvarc fix

Ljepilo za keramičke radove bazirano na cementu, aditivima i kvarcnom pijesku.

Namjenjeno za podne i zidne unutarnje površine.

Kvarc fix se odlikuje dobrim svojstvima obrađivanja, ekonomičnošću i kvalitetom.

Omjer miješanja: 6,0 – 6,5 l vode na 25 kg

Vrijeme za primjenu: oko 2 sata

Mogućnost fugiranja: nakon 24 sata

Potrošnja: cca 3,5 kg po m²

Pakovanje: 25 kg

Kvarc fix

The adhesive for ceramic works based on cement, of additives and quartz sand.

Designed for floor and wall inner surface.

Kvarc fix is characterized by good qualities of processing, economy and quality.

Mixing ratio: 6.0 to 6.5 liters per 25 kg

Time for application: about 2 hours

The possibility of grouting: after 24 hours

Consumption: 3.5 kg per m²

Packaging: 25 kg



Knauer flex

Visokokvalitetno felkisibilno ljepilo bazirano na cemetnu, sepcijalnim adativima i kvarcnom pijesku.

Namjenjeno za unutarnje i vanjske podne i zidne površine, kao i površine sa podnim grijanjem. Kvarc fix specijal se odlikuje povećanom otpornošću na mehaničke, vremenske temperaturne uticaje, visokom stabilnošću i kvalitetom.

Ispitano prema: BDS EN 1346:2008, BDS EN 1348:2008,
BDS EN 1308:2009, BDS EN 12002:2009

Mogućnost fugiranja: nakon 24 sata

Klasa ljepila: C2TE, Pakovanje: 25 kg

Knauer flex

High quality flexible adhesive based on cementitious, sepcijalnim of additives and quartz sand. Intended for interior and exterior floor and wall surfaces, and surfaces with underfloor heating.

Kvarc fix special is characterized by increased resistance to mechanical, weather dramatic temperature effects, high stability and quality.

Tested by: BDS EN 1346: 2008, BDS EN 1348: 2008,
BDS EN 1308: 2009, BDS EN 12002: 2009

The possibility of grouting: after 24 hours

Class adhesive: C2TE, Packaging: 25 kg





KNAUER UNIVERSAL

KNAUER UNIVERSAL

Univerzalno ljepilo za termoizolacione ploče (stiropor) i armiranje fasadne mražice bazirano na cementu, specijalnim punilima i kvarcnom pijesku.

Ljepilo sadrži elastične polimere i otporno je na vremenske uticaje i smrzavanje.

Ispitano prema: BDS EN 13494:2003

Potrošnja: za pričvršćivanje EPS ploča: 4-5 kg/m²
za pripremu armiranog sloja: 3-4 kg/m²

Armiranje moguće nakon: 24 sata

Nanošenje završne žbuke moguće nakon: 48 sati, Pakovanje: 25 kg

KNAUER UNIVERSAL

Purpose adhesive for thermal insulation boards (polystyrene) and reinforcing mesh facade based on cement, special fillers and quartz sand.

The adhesive contains elastic polymers and resistant to weathering and freezing.

Tested by: BDS EN 13494: 2003

Consumption: for fixing EPS boards: 4-5 kg / m²

for the preparation of the reinforced layer: 3-4 kg / m²

Reinforcement possible after 24 hours

Applying top coat possible after 48 hours

Packaging: 25 kg



BAUMANN UNIVERSAL X 55



BAUMANN UNIVERSAL X 55

JE VISOKO KVALITETNO BIJELO LJEPILO NAMJENJENO ZA ZAVRŠNE SLOJEVE TERMOIZOLACIJSKOG SISTEMA. Proizvodi se na bazi mermera, bijelog cementa i posebnih adativa. Ljepilo sadrži elastične polimere te je otporno na vremenske uticaje. Pogodno za unutarnju i vanjsku primjenu.

Potrošnja: 3,5 – 4,5 kg/m².

Pakovanje: 25 kg, 48 kom paleta

BAUMANN UNIVERSAL X 55

HIGH QUALITATIVE WHITE adhesive for the finishing gel of the thermo-isolation system. It is produced on the basis of marble, white cement and special additives.

Baumann universal adhesive contains elastic polymers and is resistant to weather influences. Suitable for indoor and outdoor use.

Consumption: 3.5 - 4.5 kg / m².

Packaging: 25 kg, 48 pieces per pallet





KVARC-FIX 550 SPECIJAL

Kvarc fix 550 special

Građevinsko ljepilo na bazi cementa, kvarcnog pijeska i specijalnih adativa namijenjeno za lijepljenje termoizolacionih ploča EPS, XPS (stiropor, stirodur i slično).


Potrošnja: 4,5-5 kg/m² Pakovanje: 25 kg

Kvarc fix 550 special

Building adhesive cement, silica sand and special of additives intended for fixing insulation boards of EPS, XPS (polystyrene, styrofoam, etc.).

Consumption: 4.5-5 kg/m²

Packaging: 25 kg

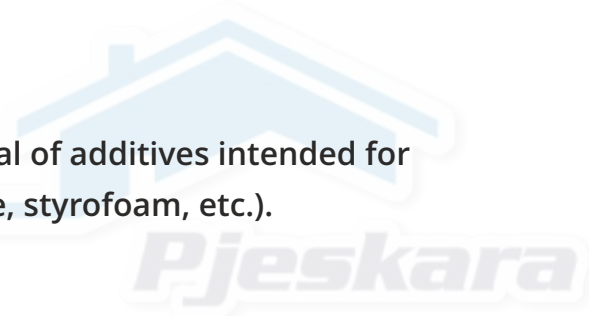

KVARCNI HIDROIZOLATOR



KVARCNI HIDROIZOLATOR

Mješavina na osnovu cementa tačno određene granulacije kvarcnog pijeska i specijalnih dodataka koji omogućavaju izradu mase za vodonepropustivu zaštitu vanjskih i unutrašnjih, horizontalnih i vertikalnih betonskih cementnih površina i za zalijevanje građevinskih elemenata kao npr.: ograde, poklopac, šahta, ankeri, montažne rupe, za zaštitu od vlage i vode za zaptivanje tuševa, sanitarija, kupatila, bazena i perionica za zaptivanje unutrašnjih podrumskih površina rezervoara za vodu. Ispitano prema: BDS EN 1542:2002; BDS EN 1062-3:2008; BDS EN ISO 7783-2:2001
Pakovanje: 25 kg

KVARCNI HIDROIZOLATOR

A mixture of cement on the basis of precisely determined granulation of quartz sands and special additives that allow for mass production of aquifer protection of external and internal, horizontal and vertical concrete cement surface area and for watering building elements such as.: fence, cover, manhole, anchors, mounting holes, for protection against moisture and water sealing of showers, bathrooms, swimming pools and wash the sealing of indoor basement surface water reservoirs.

Tested by: BDS EN 1542: 2002; BDS EN 1062-3: 2008; BDS EN ISO 7783-2: 2001

Packaging: 25 kg



KVARC-FIX LJEPILO ZA SIPOREKS

Kvarc fix ljepilo za siporex je ljepilo namijenjeno za zidanje blokova od porobetona - siporeksa, za lijepljenje elementata od porobetona-siporeksa i za popunjavanje nastalih otvora.

Potrošnja: 25 kg/m³

KVARC-FIX ADHESIVE FOR LIGHT CONCRETE BLOCKS

Kvarc fix adhesive for light concrete blocks

the adhesive intended for aerated concrete masonry blocks of - light concrete blocks, for bonding elements of aerated-concrete blocks and filling the resulting openings.

Consumption: 25 kg / m³



A Packaging: 25 kg

Colours fix kulir

Izrađen na bazi akrilata i mermenog zrna različiti boja i granulacija.

Colours fix kulir je gotov dekorativni mozaik koji vrlo dobro prijanja za podlogu i postojan je u svim klimatskih područjima. Namijenjen je za zaštitu i dekoraciju spoljnih i unutrašnjih zidova, cokli, stubišta i slično.

Potrošnja: 4kg/m²

Pakovanje: 25 kg

Colours fix kulir

Made on the basis of acrylate and mermenog grains of different colors and granulation.

Colours fix kulir is finished decorative mosaic that very good adhesion to the substrate and resistant in all climate areas.

It is intended for protection and decoration of exterior and interior walls, Sockets, staircases and the like.

Consumption: 4kg / m²



BAUMAN MINERALNA FASADA

- je praškasta jednokomponentna dekorativna suha žbuka namijenjen za zaštitu i dekoriranje unutrašnjih i vanjskih zidnih površina izrađenih od termoizolacijske ili produžene žbuke, siporeksa, betona, iverice i drugih sličnih materijala. Zavisno od načina obrade, završni premaz može biti izveden. COLOURS FIX MINERALANA FASADA ima veliku mehaničku čvrstoću, vrlo se dobro prima na raznovrsne podloge, ima dobru paropropusnost, lako se priprema i nanosi, i ima dug vijek trajanja. Boja: bijela
Pakovanje: 25 kg

BAUMAN MINERAL FACADES

- The powder-component decorative dry mortar designed to protect and decorate the interior and exterior wall surfaces made of thermal insulation or extended mortar, concrete blocks, concrete, plywood and other similar materials. Depending on the process, the final coating can be derived. COLOURS FIX mineral Facades has high mechanical strength, very well received in a variety of surfaces, has a good vapor permeability, easily prepared and applied, and has a long service life. Colour: White
Packaging: 25 kg



COLOURS FIX AKRILNA FASADA

Napravljena na bazi prirodni i sintetičkih smola i mljevenog mermera. Colours fix akrilna fasada je namijenjena za dekorisanje vanjskih i unutarnjih površina. Odlike Colours fix akrilne fasade su otpornost na različite vremenske uvjete, vodonepropusnost, paropropusnost i ekonomičnost. Mogućnost toniranja u različite boje. Ispitano prema: BDS EN 1542:2002, BDS EN 1062-3:2008, BDS EN ISO 7783-2:2001, BDS EN 13687-3:2002
Potrošnja: granulacija 1,5 mm 9-10 m² / 25 kg
Granulacija: 2 mm 7-8 m²/25 kg
Pakovanje: 25 kg

COLOURS FIX ACRYLIC FACADE

Made on the basis of natural and synthetic resin and ground marble. Colours fix acrylic facade is intended to decorate the exterior and interior surfaces. The characteristics Colours fix acrylic facade are resistant to weathering, waterproofing, water vapor permeability and economy. The possibility of toning in a different color. Tested according to: BDS EN 1542:2002, BDS EN 1062-3:2008, BDS EN ISO 7783-2:2001, BDS EN 13687-3:2002
Consumption: granulation 1,5 mm 9-10 m² / 25 kg
Granulation: 2 mm 7-8 m²/25 kg
Packaging: 25 kg





COLOURS-FIX SILIKATNA FASADA

COLOURS FIX silikatna fasada

Dekoratивно završna žbuka proizvedena na bazi prirodnih i sintetičkih smola, bijelog mermera i specijalnih adativa.

Paropropusna je i postojana u svim klimatskim područjima.

Mogućnost toniranja u različite nijasne boja.

Potrošnja: granulacija 1,5 mm 9-10 m² / 25 kg

Granulacija: 2 mm 7-8 m²/25 kg

Pakovanje: 25 kg

COLOURS FIX silicate facade

Decorative finishing plaster manufactured based on natural and synthetic resins, white marble and special of additives.

A breather is stable in all climates.

The possibility of toning in different nuance of color.

Consumption: 1.5 mm granulation 9-10 m² / 25 kg Grain size: 2 mm 7-8 m² / 25 kg



COLOURS-FIX FASADNA BOJA



Colours fix fasadna boja

Izrađena na bazi poliakrilnih disperzivnih veziva, svjetlostabilnih pigmenata, odabranih punila i adativa. Služi za bojanje i površinsku zaštitu fasada kao i unutrašnjih zidnih površina.

Potrošnja: cca 300-400 gr/m²

Pakovanje: 8, 15 i 25 kg

Colours fix facade paint

Designed on the basis of acrylic dispersion binders, light of stable pigments, selected fillers and of additives. It is used for coloring and surface protection facade and interior wall surfaces.

Consumption: 300-400 gr / m²

Packaging: 8, 15 and 25 kg





MOLERIX - POLUDISPERZIVNA BOJA

Molerix

Poludisperzivna boja za bojanje unutrašnjih zidnih površina.

Molerix je izrađen od polivinil acetatnih disperzivnih veziva, odabranih pigmenata, punila i aditiva.

Odlikuje se dobrom parapropusnosti, pokrivnoj moći i bjelinom.

Otporan na suho trenje.

Potrošnja: cca 150-180 g/m² u jednom sloju.

Pakovanje: 25 kg, 15 kg i 8 kg.

Molerix

Dispersive color painting interior wall surfaces.

Molerix is made of polyvinyl acetate dispersion of the binder, selected pigments, fillers and of additives.

It has good vapor permeability, a covering power and whiteness.

Resistant to dry friction.

Consumption: 150-180 gr / m² in a single layer.

Packaging: 25 kg, 15 kg and 8 kg.



COLOURS-FIX PODLOGA

Colours fix emulzija

Izrađena na bazi sintetičkih veziva, adativa, pigmenata i mikroniziranih punila koja penetriraju duboko u podlogu za impregnaciju fasadnih i unutrašnjih površina zida.

Nanosu se prije mineralnih, akrilnih, silikatnih fasada i kulira kao veza staro-novo i slično. Razređuje se sa vodom u odnosu 1:1.

Potrošnja: 150-200 g/m²

Pakovanje: 14 kg

Colours fix emulsion

It is made based on synthetic binders, of additives, pigments and micronized fillers which penetrate deep into the substrate for impregnation facade and interior wall surfaces.

Apply before mineral, acrylic, silicate facade as a link old and new, and the like.

Diluted with water in the relevant 1: 1.

Consumption: 150-200 gr / m²

Packaging: 14 kg



SUHI KVARCNI PIJESAK 0,1 – 1mm

Na vatri sušen kristalni kvarcni pijesak prosijan na veličinu 0,1 – 1 mm.

Koristi se za proizvodnju građevinskih ljepila, maltera, gas. betona, betonskog crijepa, betonske galanterije, kiselo otpornih podloga, estrih betona, sporskih podloga, pjeskaranje i još niz primjena u građevinarstvu.

**Pakovanje: 25 kg, BIG – 8AG vreće (cca. 1,5 t)
rinfuza (utovar u cisterne i kamione)**

DRIED QUARTZ SAND 0,1 – 1mm

Dried quartz sand was sifted to a size of 0.1 - 1 mm.

It is used for the production of building adhesives, mortars, gas concrete, concrete tiles, concrete haberdashery, acid-resistant substrates, screed concrete, preparing sports grounds, sandblasting and a number of applications in construction.

25 kg, big bags (approx. 1.5 t), refill loading on truck tanks

SEPARISANI KVARCNI PIJESAK

Separisani kvarcni pijesak. Granulacije 0,1 – 4,00 mm.

Pakovanje: rinfuza (kamion i ostala transportna sredstva)

Separated Quartz sands

Separated quartz sand. Granulation 0.1 to 4.00 mm.

Packaging:

Bulk (truck and other means of transportation)



Proizvodni program:

- Sve vrste građevinskih ljepila: ljepila za keramičke radove, ljepila za blokove od porobetona-siporeksa, fleksibilna ljepila za vanjske keramičke radove, ljepila za stiropor, ljepila za armiranje fasadne mrežice, bijela ljepila na bazi mermera
- Fasadni program: akrilne fasade, silikatne fasade, mineralne fasade, kulir plast, glet mase za unutarnju i vanjsku primjenu, fasadne boje, poludisperzije i grund emulzije
- Malteri za ručno malterisanje granulacije 1 i 3 mm
- Hidroizolacijska zaštita betona od vlage i vode i svih vremenskih i vanjskih uticaja
- Rovni kvarcni pijesak
- Separisani kvarcni pijesak
- Suhi kvarcni pijesak
- Silikatne armirane građevinske ploče za brzu gradnju

Production program:

- All types of construction adhesives: adhesives for indoor ceramic , adhesives for light concrete blocks, flexible adhesives for external ceramic , EPS adhesives, adhesive for facade mesh, marble based white adhesives
- Facade program: acrylic facades, silicate facades, mineral facades, kulir layer, finish skim coat for indoor and outdoor use, facade paints, semi-dispersion paints and grund emulsions
- Mortar for manual application granulation 1 and 3 mm
- Waterproofing of concrete against moisture and water and all weather and external influences
- Quartz sand
- Separated quartz sand
- Dry quartz sand
- Silicate cement boards



TVORNICA KVARCNOG PIJESKA, MALTERA, FASADA, FASADNIH BOJA I GRAĐEVINSKIH LJEPILA

PJESKARA d.o.o.

Donja Dobošnica bb, 75308 Lukavac, BiH

@ pjeskarakvarc@gmail.com

www.pjeskara.ba



Tel/fax: +387 35 577 045

Mob.: +387 61 730 284

+387 62 470 007